
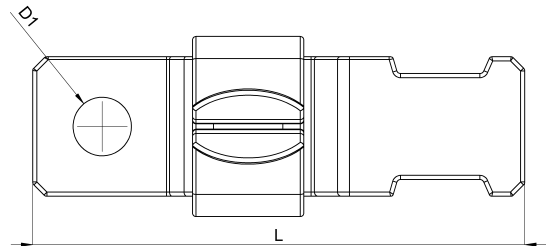



Technical data sheet

1022-223C / SKDZ 5 6 - 8

(Status as of 15/01/2024)



Design features

| | |
|------------------------------|-------------------------|
| Dimensions (L / B / H) (mm) | 35.4 x 12.8 x 20.8 |
| Shield diameter min/max (mm) | 6 / 8 |
| Hole diameter D1 (mm) | 5.2 |
| Mounting hole 1 | M5 |
| Strain relief | Yes |
| Weight (kg) | 0,004 |
| Part | shield clamp |
| Material | galvanized spring steel |
| Mounting type | screw mounting |

Order designation

| Designation | Order No. | Description | PU |
|--------------|-----------|---|--------------|
| SKDZ 5 6 - 8 | 1022-223C | Shield clamp for direct assembly with strain relief, boring for M5, shield diameter 6-8mm | PU = 10 pcs. |