
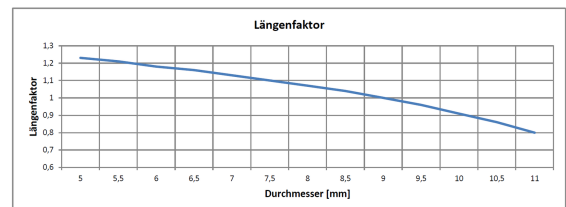
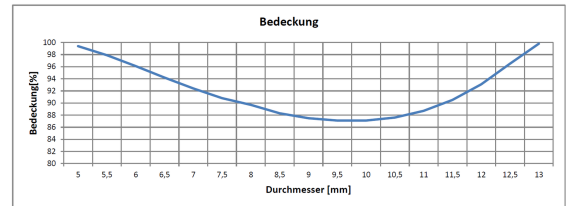


Technical data sheet

Shielding braid 2050-001A / Abschirmgeflecht 6-12 mm

(Status as of 06/04/2024)



Design features

Shield diameter min/max (mm)	6 / 12
Weight (kg)	4,500
Part	shielding braid
Material	tinned copper

Order designation

Shielding braid

Designation	Order No.	Description	PU
Abschirmgeflecht 6-12 mm	2050-001A	Copper tinned, Single wire diameter 0.15 mm, Diameter min = 6mm / max = 12mm	PU = reel 100m