
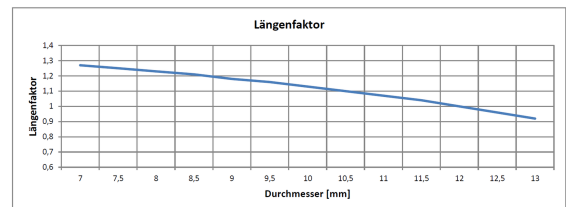
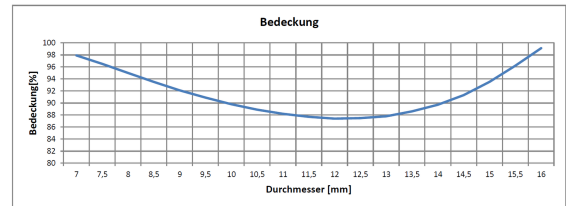


Technical data sheet

2050-002A / Abschirmgeflecht 8-16 mm

(Status as of 15/01/2024)



Design features

Shield diameter min/max (mm)	8 / 16
Weight (kg)	5,200
Part	shielding braid
Material	tinned copper

Order designation

Designation	Order No.	Description	PU
Abschirmgeflecht 8-16 mm	2050-002A	Copper tinned, Single wire diameter 0.15 mm, Diameter min = 8mm / max = 16mm	PU = reel 100m