
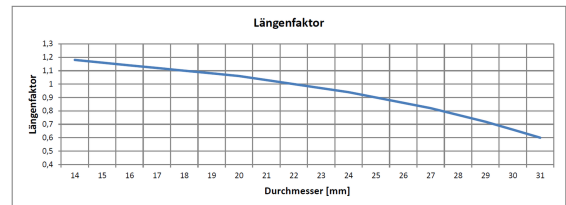
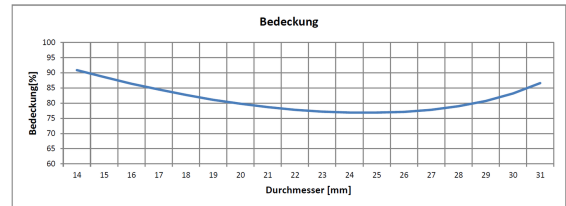


Technical data sheet

2050-003A / Abschirmgeflecht 15-30 mm

(Status as of 15/01/2024)



Design features

Shield diameter min/max (mm)	15 / 30
Weight (kg)	7,400
Part	shielding braid
Material	tinned copper

Order designation

Designation	Order No.	Description	PU
Abschirmgeflecht 15-30 mm	2050-003A	Copper tinned, Single wire diameter 0.15 mm, Diameter min = 15mm / max = 30mm	PU = reel 100m