
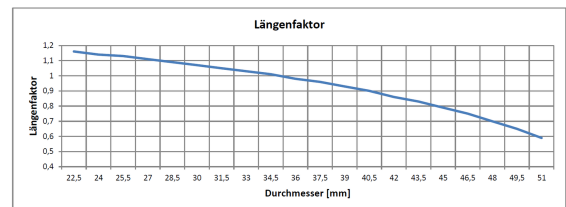
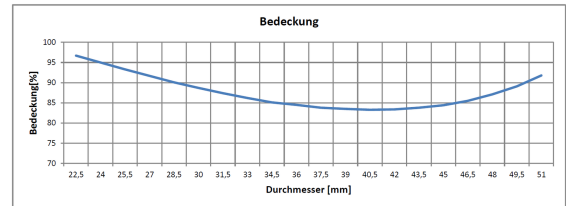


Technical data sheet

2050-004A / Abschirmgeflecht 24-48 mm

(Status as of 15/01/2024)



Design features

Shield diameter min/max (mm)	24 / 48
Weight (kg)	13,340
Part	shielding braid
Material	tinned copper

Order designation

Designation	Order No.	Description	PU
Abschirmgeflecht 24-48 mm	2050-004A	Copper tinned, Single wire diameter 0.15 mm, Diameter min = 24mm / max = 48mm	PU = reel 100m